
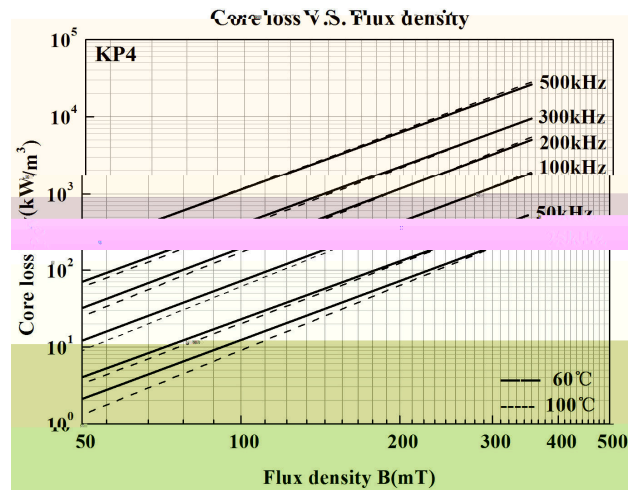
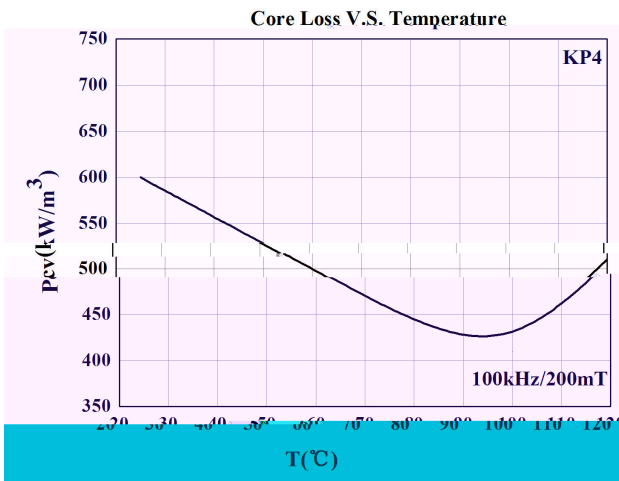
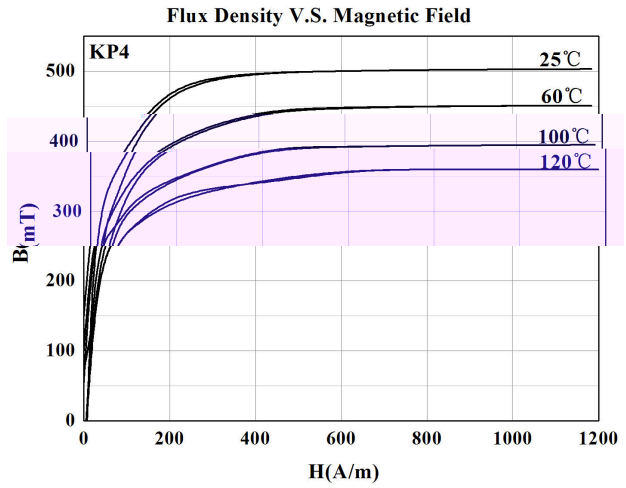


## KP4 材料特性

### Material Characteristics

特性 Symbol	单位 Unit	测试条件 Conditions		典型值 Value
初始磁导 $\mu_i$ Initial permeability ( $\pm 25\%$ )		25°C		2500
饱和磁感应强度 $B_s$ Saturation flux density	mT	60 Hz 1194 A/m	25°C	510
			100°C	390
剩磁 $B_r$ Residual magnetic flux density	mT	25°C		95
		100°C		55
矫顽力 $H_c$ Coercive force	A/m	25°C		14
功耗 $P_{cv}$ Power loss	kW/m <sup>3</sup>	100 kHz 200 mT	25°C	600
			60°C	450
			100°C	410
			120°C	510
居里温度 $T_c$ Curie temperature	°C			215
电阻率 Resistivity	$\Omega \cdot m$	25°C		6.5
密度 $d$ Density	kg/m <sup>3</sup>	25°C		$4.8 \times 10^3$

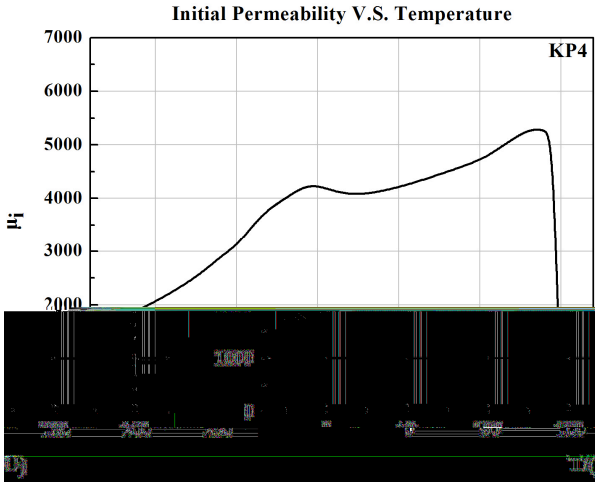

以上数据是根据标准样环  $\phi 25 \times \phi 15 \times 7.5$  获得的典型数据，有关产品的具体性能会在此基础上有所调整。

The above typical data are calculated from the standard toroid core. Specific performance of the product will be adjusted on this basis.